



# System F9

## KLB CONDUCTIVE DIFFUSION LOW-VOC EP EX


Water vapour-permeable, low-emission, conductive epoxy resin coating

The coating system F9 is particularly suitable for substrates with rising moisture from the rear or generally, increased damp, "waterproof" substrates. It can be used on all floors that, from a technical point of view, must not be coated with a vapour-proof covering, while still being electrically conductive.

Typical application areas for this diffusible smooth coating are, for example, when reworking magnesia or calcium sulphate screeds on industrial or commercial surfaces with medium mechanical load.

The system complies with the requirements posed by Indoor Air Comfort Gold Label Version 6.0 (2017) which guarantees regular testing and confirmation of the system's low-emissions. The components of this build-up have been certified for sustainable building according to DGNB, LEED or Minergie ECO.

**Alternative systems:** [System F1](#) for EX protection, [System F2](#) for ESD requirements.

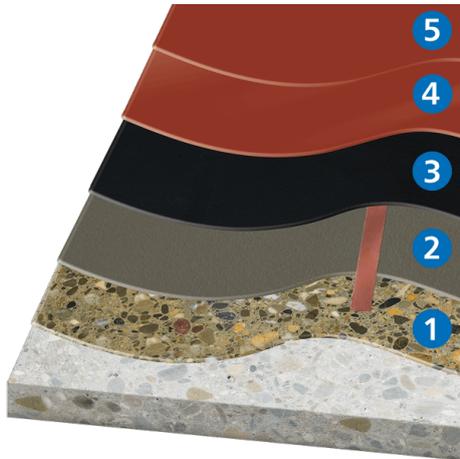

5. Top sealer **KLB-SYSTEM EPOXID EP 790 EL+**
4. Top coat **KLB-SYSTEM EPOXID EP 785 EL+**
3. Conductive layer **KLB-SYSTEM EPOXID EP 799 Ableitgrund** with copper strip **KLB-Kupferband** attached underneath
2. Scratch coat with **KLB-SYSTEM EPOXID EP 782 E Spachtelgrund**
1. Primer **KLB-SYSTEM EPOXID EP 727 E**

### System build-up

Layer	See product information for more details
<b>Total layer thickness</b>	approx. 2.0 - 2.5 mm
<b>Top sealer (5)</b>	<b>KLB-SYSTEM EPOXID EP 790 EL+</b>
<b>Top coat (4)</b>	<b>KLB-SYSTEM EPOXID EP 785 EL+</b>
<b>Conductive layer (3)</b>	<b>KLB-SYSTEM EPOXID EP 799 Ableitgrund</b> , with copper strip <b>KLB-Kupferband</b> attached underneath
<b>Scratch coat (2)</b>	<b>KLB-SYSTEM EPOXID EP 782 E Spachtelgrund*</b> <small>*alternatively, with EP 724 E Haftgrund Super while adding water and quartz sand 0.3/0.8 mm</small>
<b>Primer (1)</b>	<b>KLB-SYSTEM EPOXID EP 727 E*</b> <small>*alternatively, EP 724 E Haftgrund Super while adding water</small>
<b>Substrate</b>	Requirements to the substrate according to BEB worksheets and our primer list or by consultancy from our technical sales service/application technology

**Area of application**

**Special solutions:**

- Explosion protection coating (conductive)
- Low-emission coatings

**Healthcare:**

- Hospital
- Pharmaceutical industry
- Clean room

---

**System features**

- water vapour-permeable
- resistant to mechanical load
- rigid
- silk-matt
- smooth
- slightly slip-resistant R9/R10
- low-VOC (AgBB)
- conductive (EX/personal protection)

---

**Technical data**

<b>Compressive strength (EP 785 EL+)</b>	> 50	N/ mm <sup>2</sup>	DIN EN 196/1
<b>Diffusion resistance rate (EP 785 EL+)</b>	1290	-	DIN EN ISO 12572
<b>Diffusion equivalent air layer thickness Sd (EP 785 EL+)</b>	(2 mm) 2.6	m	DIN EN ISO 7783-2
<b>Electrical resistance (EP 785 EL+)</b>	(in combination with EP 799 Ableitgrund) Approx. 10 <sup>6</sup>	Ohm	DIN EN 61340-4-1
<b>Shore-hardness D (EP 785 EL+)</b>	80	-	DIN 53505 (after 7 days)

The values established in tests are average values. Deviations from the product specification may occur.

---

**Tests and certifications**

The following external test certificates are available for the system:



- Certified as low-emission according to Eurofins "Indoor Air Comfort Gold". Compliant with AgBB and suitable for recreation rooms.
  - Declaration of performance in accordance with Annex III to Regulation (EU) No. 305/2011 (Construction Products Regulation)
  - Declaration of product conformity with Environmental Product Declarations (EPD)
- 



Please consider the latest version of this system information on our website.

---

All stated information is based on our experience and technical preparation. We guarantee the correct and proper quality of our products. We do not assume any responsibility for the work not carried out by us, since we have no influence on the processing or processing conditions. We recommend on-site trials to be conducted. With appearance of this new KLB system information, all prior information loses validity. The updated version is available on our website [www.klb-koetzal.com](http://www.klb-koetzal.com). In addition, our "General Terms and Conditions" apply.

---