



System G8

KLB DECOR LOW-VOC PU Comfort Silent


Slightly non-slip, noise-reducing, low-emission polyurethane resin comfort coating

The coating system G8 fulfils many demands on slightly slip-resistant, low-emission floors for recreation rooms or commercial areas with lower to medium mechanical load. The system's elastic intermediate layer is extremely comfortable to walk on and at the same time, reduces impact sound - so that a pleasant room atmosphere is created.

The system thus is particularly suitable for sales and office rooms, exhibitions, doctor's surgeries, nursing homes, kindergartens, schools and many more.

The system complies with the requirements posed by Indoor Air Comfort Gold Label version 6.0 (2017) which guarantees regular testing and confirmation of the system's low emissions. The components of this build-up have been certified for sustainable building according to DGNB, LEED or Minergie ECO.

Alternative systems: [System G2](#) without any requirements on a higher walking comfort.

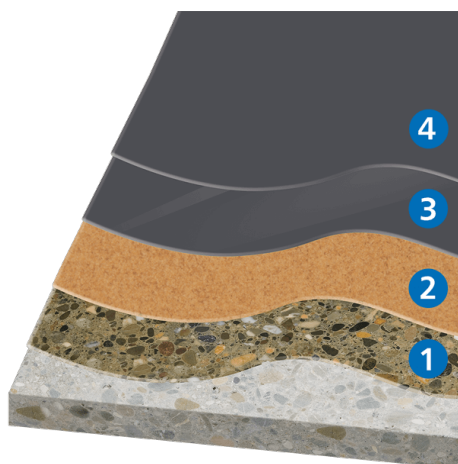

4. Coloured matt sealer **KLB-SYSTEM POLYURETHAN PU 806 E**
3. Top coat **KLB-SYSTEM POLYURETHAN PU 425 Comfort**
2. Intermediate layer **KLB-SYSTEM POLYURETHAN PU 430 Silent**
1. Primer **KLB-SYSTEM EPOXID EP 57**, openly scattered with quartz sand **KLB-Quarzsand 0.3/0.8 mm**

System build-up

Layer	See product information for more details
Total layer thickness	approx. 5.5 - 8.5 mm
Matt sealer (4)	KLB-SYSTEM POLYURETHAN PU 806 E** <small>**alternatively, PU 806 E-R10 can be used.</small>
Top coat (3)	KLB-SYSTEM POLYURETHAN PU 425 Comfort
Intermediate layer (2)	KLB-SYSTEM POLYURETHAN PU 430 Silent
Primer (1)	KLB-SYSTEM EPOXID EP 57* , openly scattered with quartz sand KLB-Quarzsand 0.3/0.8 mm <small>*alternatively, EP 58 or EP 53 Spezialgrund AgBB can be used.</small>
Substrate	Requirements to the substrate according to BEB worksheets and our primer list or by consultancy from our technical sales service/application technology

Area of application

Offices and public facilities:

- Office and administration
- Decoration and design
- Trade and presentation
- Museum
- Spa and fitness
- Living
- Public facilities

Healthcare:

- Hospital

Special solutions:

- Low-emission coatings

System features

- application area - Indoor
- impact sound insulating
- elastic
- colour-stable
- matt
- smooth
- slightly slip-resistant R9/R10
- low-VOC (AgBB)

Technical data

Shore-hardness A (PU 425 Comfort)	76	-	DIN 53455 (after 7 days)
Abrasion (Taber Abraser) (PU 806 E)	< 13	mg	ASTM D4060

The values established in tests are average values. Deviations from the product specification may occur.

Tests and certifications

The following external test certificates are available for the system:

- Certified as low-emission according to Eurofins "Indoor Air Comfort Gold".
Compliant with AgBB and suitable for recreation rooms.

- Slip-resistance according to DIN 51130 and BGR 181: grade R10 when using top sealer **PU 806 E-R10**
 - Fire behaviour classification according to DIN EN 13501-01:2010-01: C_{fl}-s1
 - Impact sound reduction in the system according to DIN EN ISO 727-2: 11 dB
 - Declaration of performance in accordance with Annex III to Regulation (EU) No. 305/2011 (Construction Products Regulation)
 - Declaration of product conformity with Environmental Product Declarations (EPD)
-



Please consider the latest version of this system information on our website.

All stated information is based on our experience and technical preparation. We guarantee the correct and proper quality of our products. We do not assume any responsibility for the work not carried out by us, since we have no influence on the processing or processing conditions. We recommend on-site trials to be conducted. With appearance of this new KLB system information, all prior information loses validity. The updated version is available on our website www.klb-koetzal.com. In addition, our "General Terms and Conditions" apply.
