

## System K3


### KLB PARKING PU OS11b Indoor

Crack-bridging surface protection system according to DAfStb directive OS 11b

The coating system K3 complies with all requirements in accordance with the TR maintenance directive or RiLi SIB (DAfStb) based on OS 11b for the production of tested car park coatings. The system offers increased dynamic capability for crack-bridging on surfaces that are accessible to foot and vehicle traffic, but must not be used on weather-exposed surfaces. As a result from production processes, the system's layer thickness is at > 4.0 mm, plus the surcharge for roughness depth.

In indoor areas, the system is particularly suitable as car park coating with an adjusted slip-resistance grade of R11. As surface protection system, it is impermeable to liquids, thus protecting the underlying building structure.

**Alternative systems:** [System K1](#) as OS 8 version in the interior, [System K2](#) as OS 11a version for use in outdoor areas exposed to the elements.

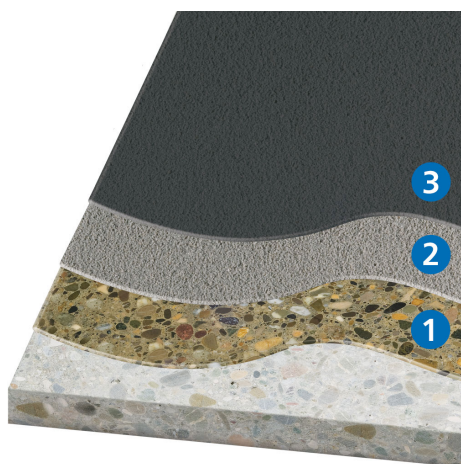

3. Top sealer **KLB-SYSTEM EPOXID EP 5570**
2. Elastic wearing and sealing layer with **KLB-SYSTEM POLYURETHAN PU 5550**, fully scattered with quartz sand **KLB-Quarzsand 0.3/0.8 mm**
1. Primer **KLB-SYSTEM EPOXID EP 5520**, openly scattered with quartz sand **KLB-Quarzsand 0.3/0.8 mm**

#### System build-up

Layer	See product information for more details
<b>Total layer thickness</b>	> 4 mm (+ surcharge for depth of roughness)
<b>Top sealer (3)</b>	<b>KLB-SYSTEM EPOXID EP 5570</b>
<b>Floating/Wearing layer (2)</b>	<b>KLB-SYSTEM EPOXID EP 5550</b> , fully scattered with quartz sand <b>KLB-Quarzsand 0.3/0.8 mm</b>
<b>Primer (1)</b>	<b>KLB-SYSTEM EPOXID EP 5520*</b> , openly scattered with quartz sand <b>KLB-Quarzsand 0.3/0.8 mm</b> <small>*alternatively, EP 5530 can be used</small>
<b>Substrate</b>	Requirements to the substrate according to BEB worksheets and our primer list or by consultancy from our technical sales service/application technology

## Area of application

### Automotive, garages and car parks:

- Car parks, parking decks and underground parking lots
- Garages in private use

## System features

- application area - Indoor
- impervious to fluids
- resistant to mechanical load
- crack-bridging
- elastic
- glossy
- slip-resistant in R11
- structured

## Technical data

<b>Elongation at break (PU 5550)</b>	Approx. 600 (at 23 °C / 73.4 °F), Approx. 300 (at -20 °C / -4 °F)	%	DIN 53504
<b>Shore-hardness D (EP 5570)</b>	80	-	DIN 53505 (after 7 days)

The values established in tests are average values. Deviations from the product specification may occur.

## Tests and certifications

The following external test certificates are available for the system:

- Fire behaviour classification according to DIN EN 13501-01:2010-01: B<sub>fl</sub>-s1
- Slip-resistance according to DIN 51130 and BGR 181: grade R11 V6
- Test report (system test): Performance characteristics test, for the use as a surface protection system/product following DIN EN 1504-2 "Products and systems for the protection and maintenance of concrete supporting structures, part 2: surface protection systems for concrete; German version EN 1504-2:2004", in consideration of DIN V 18026, "Surface protection systems for concrete from products according to DIN EN 1.5.2004-2" and in accordance with the DAfStb guidelines "Protection and maintenance of concrete components".
- Parking Abrasion Test (PAT): VK1
- Declaration of performance in accordance with Annex III to Regulation (EU) No. 305/2011 (Construction Products Regulation)
- Declaration of product conformity with Environmental Product Declarations (EPD)



Please consider the latest version of this system information on our website.

All stated information is based on our experience and technical preparation. We guarantee the correct and proper quality of our products. We do not assume any responsibility for the work not carried out by us, since we have no influence on the processing or processing conditions. We recommend on-site trials to be conducted. With appearance of this new KLB system information, all prior information loses validity. The updated version is available on our website [www.klb-koetzta.com](http://www.klb-koetzta.com). In addition, our "General Terms and Conditions" apply.