



## System I2


### KLB CHEMORESIN PU-BETON RX

Industrial flooring for wet areas exposed to hot water and chemicals, with slip-resistant surface

The coating system I2 is characterised by a better temperature resistance than conventional epoxy or reactive resin systems. It is used in areas that are frequently exposed to water, hot water, high temperatures or chemicals – which must therefore be sufficiently slip-resistant in order to guarantee occupational safety. These properties make the system suitable for floor coverings in the food production and processing, beverage industry, chemical industry and many other sectors.

The slip-resistant coating (grade R11 to R13) is cleanable with steam jets. Due to its chemical composition, it is not set to be resistant to UV exposure and thus, yellowing occurs. However, the high-quality technical characteristics of the flooring are not affected by this. The thermal resistance depends on the layer thickness or the type of mortar coating. **CHEMORESIN PU-BETON PU 4009** has a higher temperature resistance than **PU-BETON 4006**, whereas **PU-BETON 4004** has the lowest thermal stability. The individual components of **System I2** have been certified by EUROFINS and each carries the EMICODE EC1 Plus label; thus meeting the requirements for a sustainable building certification according to DGNB, LEED or BREEAM; not only the German requirements of AgBB or ABG, but also the emissions regulations of many other European countries.

**Alternative systems:** [System I1](#) with lower antislip properties of grades R9 to R10, [System I3](#) with reduced installation times to obtain a slip-resistance grade of R11.

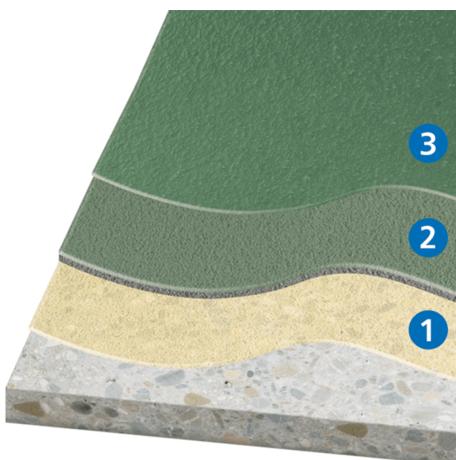

3. Top sealer **CHEMORESIN PU-BETON 4080**
2. Mortar coating with **CHEMORESIN PU-BETON 4004/4006/4009**, scattered with **KLB quartz sand** or **corundum** depending on the desired slip-resistance (please refer to test certificates)
1. Primer **CHEMORESIN PU-BETON 4051**


**System build-up**

|                       |  |
|-----------------------|--|
| Layer                 | See product information for more details   |
| Total layer thickness | approx. 4.5 - 10.5 mm (depending on mortar coating)  |
| Top sealer (3)        | <b>CHEMORESIN PU-BETON 4080</b>  |
| Mortar coating (2)    | <b>CHEMORESIN PU-BETON 4004/4006/4009</b> , scattered with <b>KLB quartz sand or corundum</b>  |
| Primer (1)            | <b>CHEMORESIN PU-BETON 4051</b>  |
| Substrate             | Requirements to the substrate according to BEB worksheets and our primer list or by consultancy from our technical sales service/application technology. Suitable are concrete C25/30 or cement screed CT-C35-F5-V60 in minimum quality. |

**Area of application**
**Industry:**

- Manufacturing and production

**Foodstuffs:**

- Butcheries, slaughterhouses, dairy, meat and fish industry
- Beverages industry and breweries
- Commercial kitchens

**Special solutions:**

- Resistance to hot water

**Technical data**

|   |            |                    |                          |
|---|------------|--------------------|--------------------------|
| Bending tensile strength (CHEMORESIN PU-BETON 4004) | 15         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Compressive strength (CHEMORESIN PU-BETON 4004)     | 43         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Shore-hardness D (CHEMORESIN PU-BETON 4004)         | 82         | -                  | DIN 53505 (after 7 days) |
| Bending tensile strength (CHEMORESIN PU-BETON 4006) | 15         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Compressive strength (CHEMORESIN PU-BETON 4006)     | 43         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Shore-hardness D (CHEMORESIN PU-BETON 4006)         | 82         | -                  | DIN 53505 (after 7 days) |
| Bending tensile strength (CHEMORESIN PU-BETON 4009) | 14         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Compressive strength (CHEMORESIN PU-BETON 4009)     | 45         | N/ mm <sup>2</sup> | DIN EN 196/1             |
| Shore-hardness D (CHEMORESIN PU-BETON 4009)         | 85         | -                  | DIN 53505 (after 7 days) |
| Gloss level (CHEMORESIN PU-BETON 4080)              | < 10 (85°) | -                  | DIN 67530                |

The values established in tests are average values. Deviations from the product specification may occur.

**Tests and certifications**

The following external and internal test certificates are available for the system:

- Bacteriostatic activity in combination with **KLB-SYSTEM PU-BETON PU 4080 Clean** according to ISO 22196-2011-08 and JIS 2801:2000
- Individual products are certified as low-emission according to EMICODE with the EC1 Plus label. Compliant with AgBB for recreation rooms.
- Scattered coatings with slip resistance grade R11/V4, R12/V4, R12/V6, R13/V6, R13/V10 possible, according to DIN EN 16165 and DIN 51130.

- Fire behaviour classification according to DIN EN 13501-01:2010-01: B<sub>fl</sub>-s1.
- Suitable for use in foodstuffs according to § 31 para. 1, German Food and Feed Code (German law LFGB).
- Declaration of performance in accordance with Annex III to Regulation (EU) No. 305/2011 (Construction Products Regulation)
- Declaration of product conformity with Environmental Product Declarations (EPD)

### Special remarks

The hardening times can be reduced by adding CHEMORESIN PU-BETON 4094 KAT. Please observe the product data sheet of the catalyst.



Please consider the latest version of this system information on our website.

All stated information is based on our experience and technical preparation. We guarantee the correct and proper quality of our products. We do not assume any responsibility for the work not carried out by us, since we have no influence on the processing or processing conditions. We recommend on-site trials to be conducted. With appearance of this new KLB system information, all prior information loses validity. The updated version is available on our website [www.klb-koetztal.com](http://www.klb-koetztal.com). In addition, our "General Terms and Conditions" apply.