

KLB-Colorsand CQS-46xx

Standard colours sand mixtures for anti skid broadcast RX flooring

Colour stable sand mixtures for decorative broadcast RX flooring. Easy to use sand mixtures with controlled consumption, grindable for floorings with slip resistance levels R10, R11 and R12.




CQS-4601 | 0,3/0,8 mm Base* white
CQS-4651 | 0,7/1,2 mm




CQS-4602 | 0,3/0,8 mm Base* light grey
CQS-4652 | 0,7/1,2 mm



CQS-4603 | 0,3/0,8 mm Base* middle grey
CQS-4653 | 0,7/1,2 mm

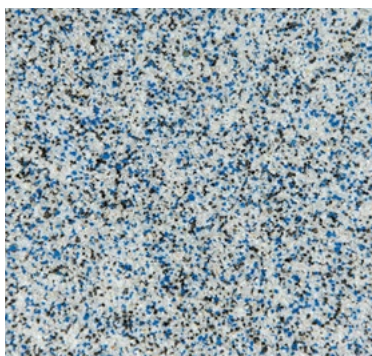

CQS-4604 | 0,3/0,8 mm Base* light grey
CQS-4654 | 0,7/1,2 mm

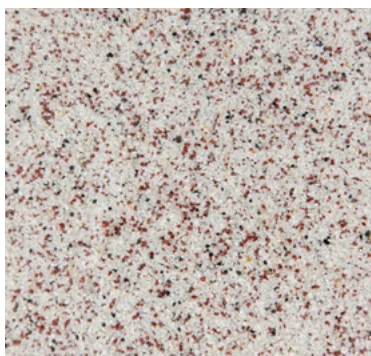

CQS-4605 | 0,3/0,8 mm Base* light grey
CQS-4655 | 0,7/1,2 mm



CQS-4606 | 0,3/0,8 mm Base* white
CQS-4656 | 0,7/1,2 mm



CQS-4607 | 0,3/0,8 mm Base* light grey
CQS-4657 | 0,7/1,2 mm



CQS-4608 | 0,3/0,8 mm Base* blue
CQS-4658 | 0,7/1,2 mm

* **Base:**
Colour of the base coat EP 99 or PU 424

KLB-Colorsand antistatic CQS-47xx AS

Standard colours antistatic sand mixtures for anti skid broadcast RX flooring

Colour stable antistatic sand mixtures for decorative broadcast RX flooring. Easy to use sand mixtures with controlled consumption, grindable for floorings with slip resistance levels R11 and R10.



CQS-4701 AS | 0,3/0,8 mm Base* light grey



CQS-4702 | 0,3/0,8 mm Base* middle grey



CQS-4703 | 0,3/0,8 mm Base* light grey



CQS-4704 | 0,3/0,8 mm Base* light grey

* Base:
Colour of the base coat EP 99 EL+

Utilization	Anti skid RX flooring. Please consider our product information!
Standard colours	The colour chart shows available standard colours. Available from stock, in minimum quantities of 25 kg.
Special colours	Available in minimum quantities of 1.000 kg net. Please note the extended delivery time!
Packaging	Bag of 25 kg, 40 Bags/euro pallet 1.000 kg

Important legal notice: The samples listed show the typical colour scheme. Deviations are possible depending on the batch. In order to avoid colour deviations on one surface, it is recommended to always use the material from one batch. The present illustrations may be falsified during printing. In case of doubt, please request an original sample. All stated information is based on our previous experience and composition. It is not possible to consider every single case. Please seek advice for your special cases. We guarantee the correct and proper quality of our products. We do not assume responsibility for the work not carried out by us since we have no influence on the processing or processing conditions. We recommend that on-site-trials will be conducted. Our "General Terms and Conditions" apply.